

EVALUATION OF LOCAL SITES EFFECTS IN LIMA CITY, PERU FROM GROUND MOTION DATA

Selene Quispe¹⁾, Hiroaki Yamanaka²⁾, Hernando Tavera³⁾, Fernando Lazares⁴⁾ and Zenon Aguilar⁴⁾

1) Doctoral Student, Tokyo Institute of Technology, Japan

2) Professor, Dept. of Environmental Science and Technology, Tokyo Institute of Technology, Japan

3) Researcher, Department of Seismology, Geophysical Institute of Peru, Peru

4) Professor, Fac. of Civil Engineering, National University of Engineering, Peru

selene.q.aa@m.titech.ac.jp, yamanaka@depe.titech.ac.jp, hernando.tavera@igp.gob.pe, f_lazares@uni.edu.pe, zaguilar@uni.edu.pe

Abstract: The present study aims to examine thoroughly the relation between the local site effects and the local subsurface conditions in Lima city, due to the fact that there is little information related to the seismic amplification in this city. Using ground motion records, the amplification effects are studied empirically, in the frequency range from 0.1 to 20 Hz. This study analyzes the seismic events observed along the Pacific coast of Lima city, which were recorded by 10 stations. Because of the limitation in data, site amplification factors are evaluated by using three different methods: the standard spectral ratio, the spectral inversion method and the H/V ratio, so as to identify the significant peaks and troughs at all sites. Results show that most of the stations present relatively large amplifications in the high-frequency range over 3 Hz, moreover RIN station. Nonetheless, CAL site has a different behavior of amplification.

1. INTRODUCTION

A future large earthquake is expected to occur in Lima city, the capital and most densely-populated city of Peru. According to several works (Okal et al. (2006) and Pulido et al. (2010)) the seismic gap that has been identified near coast of Lima city might generate a gigantic magnitude ~9.0 Mw event, which could occur any time within the next 20 years.

During the 1974 October 3 Mw8.0 earthquake – the last event of considerable magnitude that Lima city has been subjected – with focal depth about 13 km, few areas outside of Lima center were severely damaged, such as La Campiña (Chorrillos), La Molina and Callao – La Punta (Repetto et al. 1980). Works described by Husid et al. (1977), Espinoza et al. (1977), Repetto et al. (1980) and Stephenson et al. (2009) refer that these areas were affected by the influence of local surface conditions. For example, in La Molina district it was possible to observe the collapse of reinforced concrete structure during the October 3, 1974, earthquake.

The present study uses ground motion records observed along the Pacific coast of Lima city, Peru, in which the seismic events were recorded by 10 stations, including stations installed both at La Molina and Callao districts. The relation between local subsurface conditions and the local site effect in some areas of Lima city are discussed based on the results obtained from three empirical methods.

2. GROUND MOTION DATA AND ACCELEROMETER STATIONS

Data from 2003 to 2008 was used in this study so as to analysis the site effects at 10 stations. Table 1 gives pertinent information on the 17 events used in this work, and Figure 1 shows their locations relative to our recording sites. These seismic events are superficial and intermediate earthquakes, with Local Magnitude ML from 3.8 to 7.0. The epicentral distances range between ~55 and ~200 km. Because the PGAs were mostly small, we can assume linear site responses, even during the 2007 August 15th Pisco earthquake (Mw 8.0) the influence of non-linearity on the site response was not detected (Quispe 2010).

In addition, from the ten stations used in this work, four stations (CSM, CAL, MOL and CDLCIP) are maintained by CISMID Accelerometer Network, nonetheless MOL site was removed after Pisco earthquake struck, three stations (CER, RIN and PUCP) deployed by the South American Regional Seismological Centre (CERESIS) and three stations (MAY, LMO and NNA) deployed by the Geophysical Institute of Peru (IGP).

All the observation sites are shown in Figure 1 on the geological map of Lima city (Martinez et al. 1975). According to this map, basically most of the stations (sites MAY, CER, RIN, CAL, CDLCIP, CSM, MOL and PUCP) are located on alluvial soil deposits belonging to the Quaternary Holocene (Figure 1), however sites LMO and NNA are located on cretaceous intrusive rock (Figure 1).

Table 1 Event Information (* Means the Event Was Recorded).

Date yyyy/mm/dd	Hour hr:min	Long. (deg)	Lat. (deg)	Mag. (ML)	Depth (km)	Site CSM	Site CAL	Site MOL	Site CDLCIP	Site CER	Site RIN	Site PUCP	Site MAY	Site LMO	Site NNA
2003/05/08	16:33	-77.40	-12.98	5.4	51	*	-	-	-	-	-	*	-	-	*
2003/05/28	21:26	-77.01	-12.48	5.3	51	*	-	-	-	-	-	-	-	-	-
2005/01/17	11:26	-76.78	-12.10	3.8	54	-	-	-	-	-	-	-	-	-	*
2005/03/02	13:48	-76.14	-11.86	5.7	124	-	-	-	-	*	-	-	-	-	*
2005/07/25	6:51	-77.33	-12.24	4.0	42	*	-	*	-	-	-	-	-	-	-
2005/11/10	16:38	-76.22	-12.26	4.0	71	-	*	-	-	-	-	-	-	-	-
2005/12/27	17:02	-76.57	-12.22	4.5	99	*	-	-	-	-	-	-	-	-	-
2006/05/12	3:45	-77.40	-11.96	4.3	80	-	-	-	-	-	-	-	-	*	-
2006/10/20	10:48	-77.02	-13.55	6.2	43	*	-	*	-	-	*	*	*	-	*
2006/10/22	22:14	-77.60	-12.05	3.8	30	-	-	-	-	-	-	-	-	-	*
2006/10/26	22:54	-76.92	-13.44	5.8	42	-	-	-	-	-	-	-	*	*	-
2006/12/11	21:53	-77.37	-11.64	4.2	54	-	-	*	-	-	-	-	-	*	*
2007/08/15	23:40	-76.76	-13.67	7.0	40	*	*	*	*	*	*	*	*	*	*
2007/08/17	13:18	-76.85	-13.61	5.5	23	*	-	-	-	-	-	-	-	*	-
2008/03/29	6:40	-77.73	-12.17	4.3	48	-	*	-	*	-	-	-	-	-	-
2008/03/29	12:51	-77.25	-12.25	5.3	51	*	*	-	*	-	*	-	-	*	-
2008/06/07	13:06	-77.29	-12.48	5.0	67	*	*	-	-	*	-	-	-	*	-

Source parameters were determined by the Geophysical Institute of Peru (IGP)

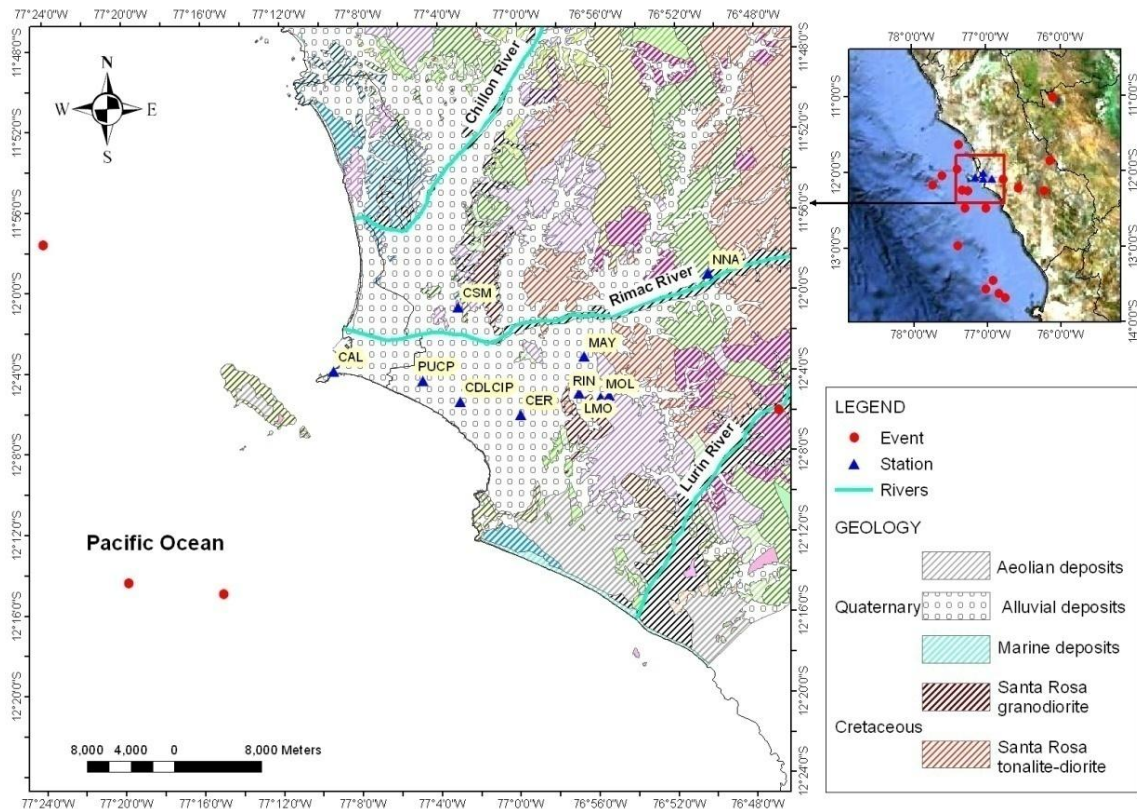


Figure 1 Red circles show the epicenter of events used for this work. Blue triangles represent the stations which are located on the geological map of Lima city (Martinez et al. 1975).

All the observation sites are shown in Figure 1 on the geological map of Lima city (Martinez et al. 1975). According to this map, basically most of the stations (sites MAY, CER, RIN, CAL, CDLCIP, CSM, MOL and PUCP)

are located on alluvial soil deposits belonging to the Quaternary Holocene (Figure 1), however sites LMO and NNA are located on cretaceous intrusive rock (Figure 1).

3. SITE RESPONSE ESTIMATION TECHNIQUES

Because of the fact that not all the analyzed events were recorded at all the ten sites as well as the limitation on data, three different empirical methods have been applied in order to get reliable information about the relevant frequencies on seismic amplification factors, such methods are the standard spectral ratio technique (Borcherdt 1970), the spectral inversion method (Iwata and Irikura 1988) and the horizontal-to-vertical spectral ratio technique (Nakamura 1988, Lermo and Chavez-Garcia 1993, Field and Jacob 1995).

The traditional spectral ratio assumes that the site response is estimated by a simple division of the amplitude spectrum calculated from a record at the analyzed station with the amplitude spectrum from a record of the same component at the reference site. However from a practical point of view, the spectral inversion method offers the advantage that records from some events can be included in the inversion even if records at the reference site are not available. This offers the advantage of a more complete exploitation of the data set (Riepl et al 1998). In addition, the inversion method simultaneously gives source, path, and site factors; nonetheless in this article, our concern is to determine the site factor and not to go into details on the other effects. The horizontal-to-vertical spectral ratio in comparison to the other techniques estimates the empirical transfer function using spectral ratios between horizontal and vertical components of motion, so no reference site is needed. For this study, NNA rock site was used as the reference site, because its spectral response shows lesser amplification levels in comparison to LMO site (Cabrejos 2009). As a constraint condition for the spectral inversion method, we set the site amplification factor for NNA to be 2, irrespective of frequency.

The processing sequence for the data set to compute the spectral ratios relative to a reference site or relative to the vertical component was as follows. From each record we selected a window of 20 sec, beginning at the shear-wave arrival. In order to recognize the onset time of S-wave, particle motion plots for two components of motion, EW component on the horizontal axis and NS component on the vertical axis (Figure 2), and Husid plots (Husid et al. 1969), where the horizontal axis is the time and vertical axis is the accumulated horizontal component square for each horizontal component (Figure 3), are realized. After that, the time window of 20 sec was cosine tapered (10%), using the same criterion took by Takemura et al. (1990), and Fourier transformed. The spectral amplitudes were then smoothed by Parzen windows of 0.6-Hz widths. Both for the standard spectral ratio and the horizontal-to-vertical spectral ratio, horizontal value is calculated by taking the geometrical average of the north-south and east-west components. For the inversion method, the Fourier acceleration amplitude spectra of two horizontal components are computed and summed vectorially.

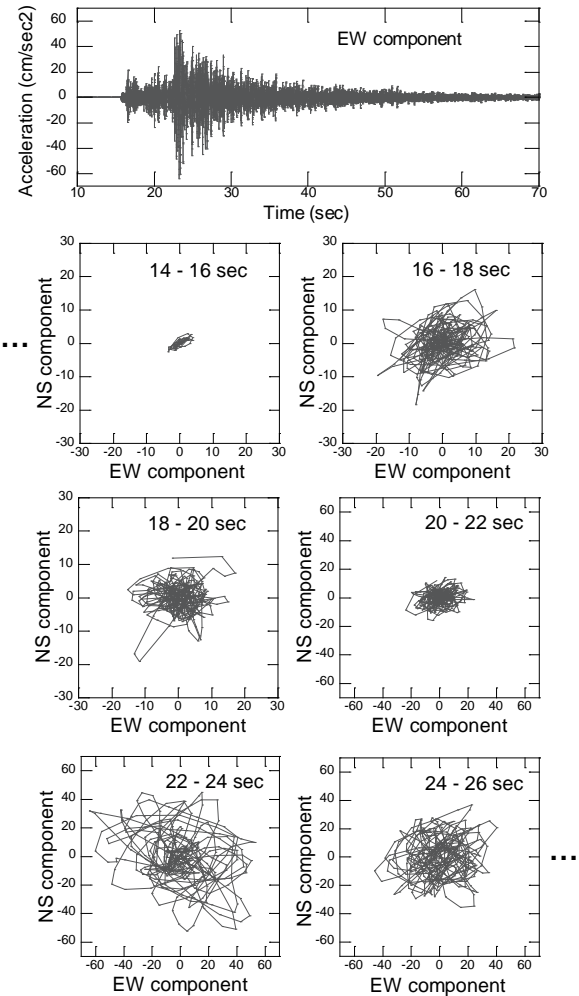


Figure 2. Particle motion plots for two components of motion (CSM station, seismic event 2008/03/29 12:51).

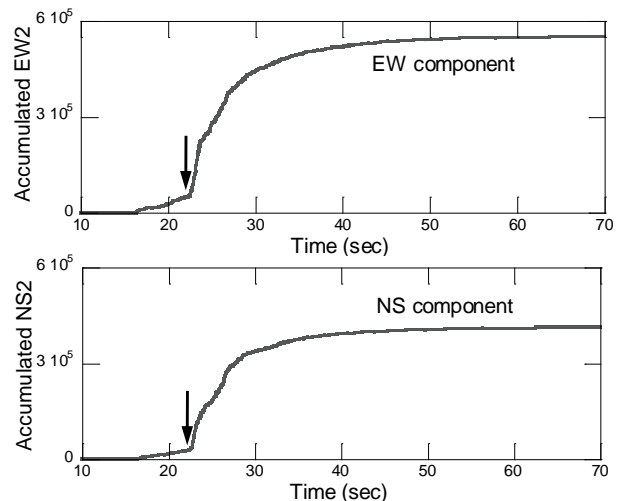


Figure 3. Husid plots to recognize the onset time of S-wave. Black arrows indicate the S-wave onset time (CSM station, seismic event 2008/03/29 12:51).

In order to take advantage that the rupture process of Pisco earthquake was composed of two major events, separated by 60 to 70 seconds (Bernal and Tavera 2007), the

first and the second main events are analyzed for this work, nonetheless the 2nd main event was not recorded by LMO station. For taking a window of 20 sec starting just before the direct S-wave arrival for these two major events, the same procedure as we previously explained was applied.

4. COMPARISON AMONG DIFFERENT EMPIRICAL METHODS

The different estimates of site amplification factors for the stations are compared in Figure 4. Those obtained from the Standard Spectral Ratio (SSR) are shown by thick solid lines, site factors estimated by Spectral Inversion Method (SIM) are shown by thin lines, and amplitude factors calculated from the Horizontal-to-Vertical Spectral Ratio (HVSR) are shown by dotted lines. The SSR for LMO site is not presented for this work given that we do not count on enough seismic events that were simultaneously recorded both for LMO and NNA sites.

According to Figure 4, the geometrical averages of SSR are very similar with inversion results in the analyzed frequency range from the analysis of small and large events. Results show that the amplification level obtained by the SIM are slightly larger in comparison to the traditional approach introduced by Borchardt (1970) as we can see for CSM, MAY, CDLCIP, PUCP, CAL, and LMO sites. This may be due to the time window of 20 sec that tend to increase slightly the inversion results with the length of the time window because of the effects of later arrivals of surface waves in the case of a long time window (Uetake and Kudo 2005), since as part of this work but results do not show, a time window only taking the S-wave portion was analyzed and inversion results coincided with SSR at many sites in the frequency range higher than 1 Hz.

On the other hand, the geometrical averages of HVSR are also compared with the reference site methods by using the same time window. Results indicate a similarity in the shape of the curves, but HVSR fails for the estimation of the amplification level, since according to Figure 4 most of the sites have much lower amplification in comparison to the other methods. This method assumes that vertical component is expected to be free of amplification, however results obtained by other studies show that subsurface structure influences the vertical component in the same order of magnitude as the horizontal components (Riepl et al. 1998).

For CSM, MAY, CER and CDLCIP stations, even though the amplification level does not fit very well among the analyzed empirical methods, the same peaks and troughs can be identified by the three methods for these four stations. Site effects on these curves (Figure 4) show several peaks of amplification between 3 and 8 Hz as well as a small bump that occurs between 1 and 2 Hz, which is more evident for CER station. Furthermore, relatively large ratios at high frequencies of 10 Hz, moreover for CSM station that has the highest amplification in comparison to the other three sites. There is also a significant trough at about 9 Hz, for CDLCIP site the prominent trough varies in the frequency range

between 6 and 10 Hz.

The different estimates for PUCP station show that several peaks of amplification can clearly be distinguished in the frequency range between 1 and 8 Hz, at least four peaks, as well as a trough at about 9 Hz as the previously mentioned stations.

For MOL station, the amplification level both for the SSR and the inversion method are in good agreement for the frequency range investigated. Higher amplifications occur at frequencies larger than 3 Hz as we can see in Figure 4. Amplification effects evaluated by the HVSR do not coincide well with the other methods, however the shape of the site spectra is similar, even a prominent trough at about 12 Hz is identified. This result suggests that the frequency response of vertical component at this site amplifies at the same level as the horizontal components.

The site response at RIN site is dominated by three prominent peaks which are well predicted in the three methods, even though the HVSR predicts lower amplitude in comparison to the reference site methods. The strongest peaks of amplification occur between 3-4 Hz, 7-8 Hz, and frequencies larger than 10 Hz.

For CAL station in comparison to the other sites which amplification levels are larger at higher frequencies, this site shows clearly that strongest amplifications appear at frequencies lower than 3 Hz for the three methods, however amplifications at higher frequencies also occur but are comparatively low. In addition, a trough at about 9-10 Hz has also been detected.

The station located on a rock outcrop, LMO site, has relatively small variations against frequency given that rock sites have local site response (Uetake and Kudo 2005).

Finally, the result of horizontal-to-vertical spectral ratio for NNA site, the reference station, shows that the average transfer function is flat for frequencies lower than 3 Hz, nonetheless no significant trends appear but values are around one. Furthermore, the frequency response at NNA site has a trough, and the trough makes the peaks at frequencies larger than 10 Hz for soft soil sites. That is why, sediment sites show peaks at frequencies larger than 10 Hz that are attributed to the spectral response of NNA given that a relatively strong trough is found.

5. EVALUATION OF LOCAL SURFACE CONDITIONS AND LOCAL SITE EFFECTS

According to the Figure 1, most of the stations are located on Quaternary alluvial deposits with the exception of the rock sites LMO and NNA. CSM, MOL, CER and CDLCIP sites are installed on alluvial gravel deposits that cover a large portion of Lima city, and present a good geomechanic behavior locally named "Lima Conglomerate" (Repetto et al. 1980 and Aguilar 2005). The site response at these stations are characterized by relatively large peaks at around 3-8 Hz, which represent the resonant modes between the poorly graded gravel deposit and other shallow materials that overlie this deposit. PUCP site is also placed on alluvial gravel deposits (Figure 5) nonetheless this site shows several

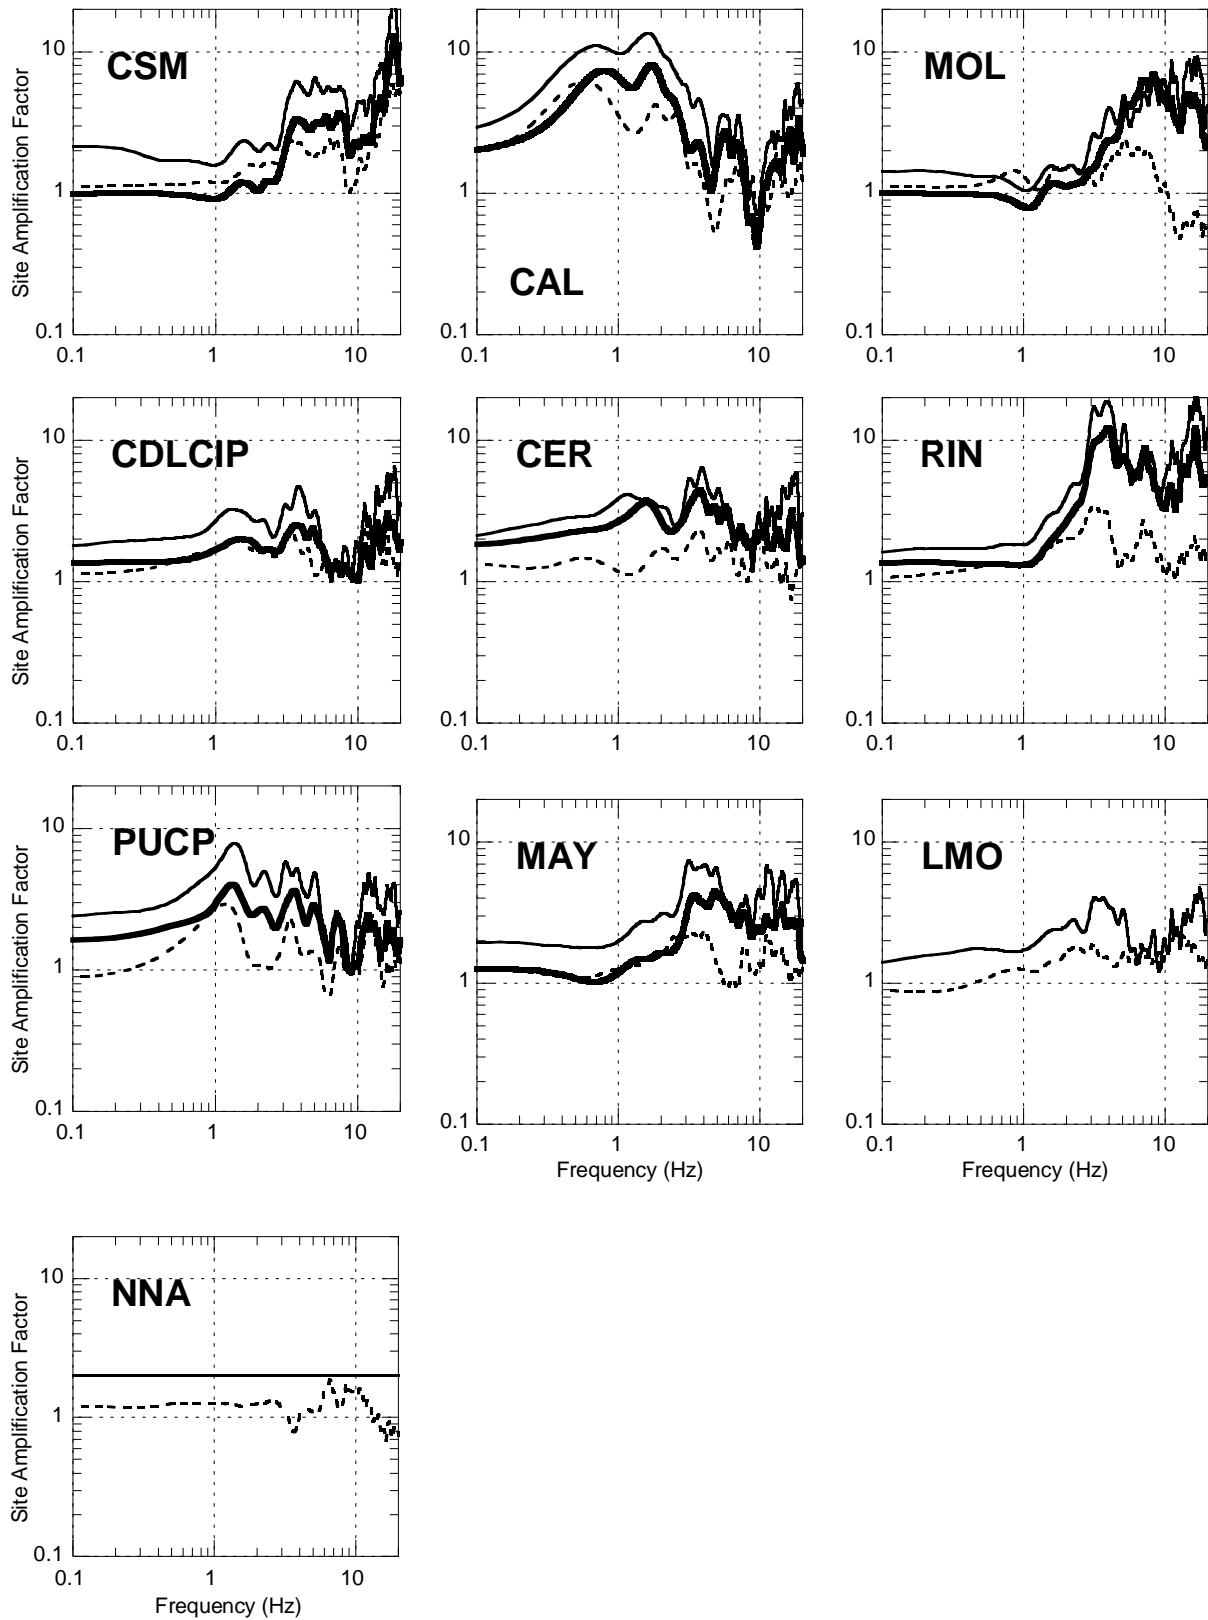


Figure 4. Comparison between spectral ratios from the horizontal components with reference to NNA, the Spectral Inversion Method and the Horizontal-to-Vertical Spectral Ratio. Thick solid lines show the geometrical average of two horizontal spectral ratios. Thin solid lines represent the results obtained by the Spectral Inversion Method. Dotted lines show the geometrical average estimated by applying the HVSR.

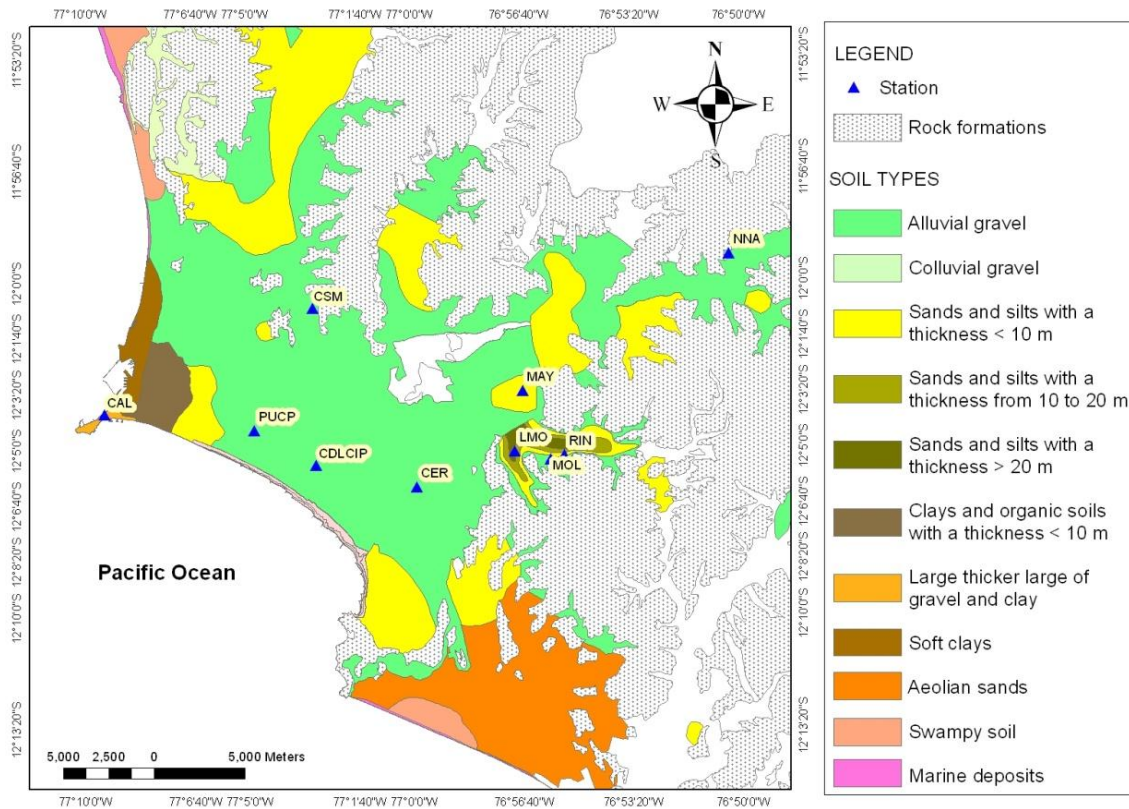


Figure 5. Soil type map of Lima city.

prominent peaks being the most significant at about 1-2 Hz (Figure 4). Our results suggest the presence at the surface of relatively softer soil layers that might contribute to the local response at this site, so it is required to carry out further studies in order to have a better understanding.

MAY and RIN sites are installed on sand and silt deposits with a thickness less than 10 m (Figure 5). At MAY station, spectral ratios show slightly large amplitudes at about 3-5 Hz due to the presence at the surface of these relatively soft layers but with a thickness less than 5 m that overlie on alluvial gravel. However, the site response at RIN station is dominated by a prominent peak between 3 and 4 Hz, which represents the first resonant mode at this site. This station shows the largest amplification factor in comparison to the other sites in this frequency range due to the medium dense sand deposits with a thickness larger than 5 m according to a soil pit near at this site. This significant peak that responds at about 3 Hz has also been detected by Stephenson et al. (2009) but by analyzing velocity response spectra.

On the other hand, CAL station shows a different behavior of amplification since important amplifications appear in the range frequency lower than 3 Hz due to the fact that this station is placed on gravel layer that overlies on a thick clay deposit.

6. DISCUSSION

Even though most stations are located on alluvial soil

deposits belonging to the Quaternary Holocene, the presence of thin soft layers that overlying the Lima Conglomerate influence in the site response, dominated by several relatively small peaks in the frequency range between 3 and 6 Hz, as we can see in the CSM, MOL, CER and CDLCIP sites (Figure 4). However, RIN station has the highest amplification levels in the same frequency range because of the fact that this site is located in La Molina district, place that back in time has been reported to be affected by the influence of local subsurface conditions (Repetto et al. 1980 and Stephenson et al. 2009).

Works developed by Lee and Monge (1968) and Stephenson et al. (2009) report that this place has a complex subsurface structure that might contribute to the local site response at La Molina. In terms of our results, the horizontal-to-vertical spectral ratio for both stations present much lower amplitudes in comparison to the reference site methods, Riepl et al. (1998) reports that it is probably the complex subsurface structure that influences the vertical component in a similar manner to the horizontal components, that makes the amplification level lower.

On the other hand, small peaks at about 6-10 Hz are commonly found for all the sediment sites, which we interpret this amplification as the predominant frequency of Lima Conglomerate. Calderon (2012) gathered information about the one-point microtremor measurements (Figure 6), and such points represent the H/V ratio peak period. So on the basis of this information, we interpret that Lima Conglomerate has a dominant period of ~0.1 sec, period or frequency that has also been identified in our results. Several

researchers have pointed out that Lima city underlies by a deposit consisting of a medium dense to very dense coarse gravel and sand with cobbles, extending from the ground surface to rock, with a thickness larger than 80 m (Repetto et al 1980, Le Roux et al. 2002, Martínez A. 2007 and Aguilar et al. 2009).

The site response for CAL station shows highest amplifications for frequencies lower than 3 Hz in accordance to the gravel layer that overlies by a thick clay deposit. Our results are also consistent with the H/V peak period distribution map (Figure 6). According to this map, the predominant period at Callao-La Punta district lies in the range of 0.41 to 0.6 sec.

In addition, MOL, RIN and CSM sites show strong peaks at frequencies larger than 10 Hz, this may be because these stations are installed very close to a hill, so further studies are needed to have a better understanding.

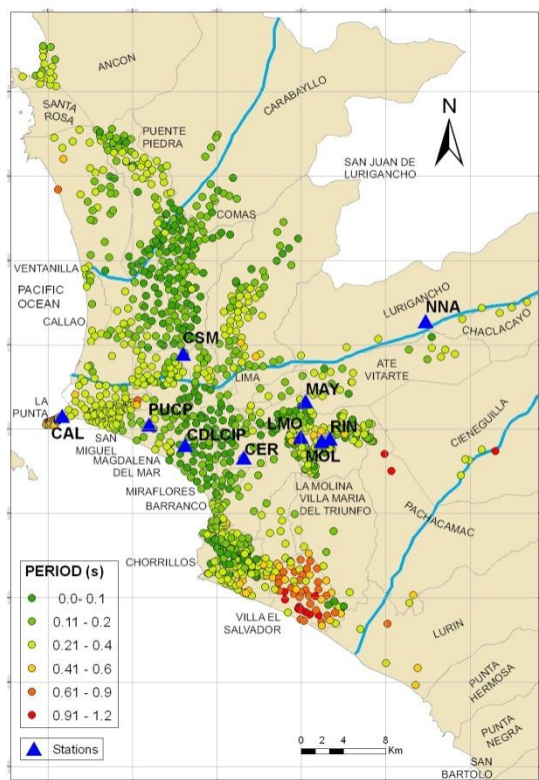


Figure 6. Location of seismic stations over the predominant period distribution map obtained from the H/V spectrum of single-point microtremor measurements (Calderon 2012).

7. CONCLUSIONS

In spite of the limitation of data, the application of the three empirical methods has allowed to evaluate the site effects on examined sites, since information about frequencies at which important amplification might appear have been provided for the study area.

Our results indicate that sediment sites show prominent peaks in the frequency range at 3-6 Hz, due to the surface

layers that overlie on the alluvial gravel deposits. Most of these stations show relatively high amplification levels. Nonetheless, CAL site shows a different behavior of amplification because of soft clay layer that underlies on this site.

Last but not least, according to our results and the predominant period distribution map (Calderon 2012), we conclude that one the dynamic site characteristics of soils in Lima city is its predominant period of ~0.1 sec.

Acknowledgements:

The authors thank the Geophysical Institute of Peru (IGP) for supplying information on instrument locations belonging to IGP, as well as for providing the accelerograms data recorded by these instruments. We are likewise grateful to the research assistants at CISMID who helped in the completion of this study.

References:

- Aguilar, Z. (2005), "Seismic Microzonation of Lima City," Japan-Peru Workshop on Earthquake Disaster Mitigation, Japan Peru Center for Earthquake Engineering and Disaster Mitigation (CISMID), Faculty of Civil Engineering, National University of Engineering, Lima, Peru.
- Aguilar Z, Martínez A. y Basurto D. (2009), "Diseño e Implementación de un Equipo de Corte Directo para Suelos Gravosos en el Laboratorio," XVII Congreso Nacional de Ingeniería Civil, Instituto de la Construcción y Gerencia (ICG), Lima, Perú (in spanish).
- Bernal, I. and Tavera, H. (2007), "Aceleraciones Máximas Registradas en la Ciudad de Lima: Sismo de Pisco del 15 de Agosto del 2007 (7.0 ML), Informe Preliminar," (in Spanish).
- Borcherdt R. D., "Effects of local geology on ground motion near San Francisco Bay," *Bull. Seismol. Soc. Amer.*, 60, 29-81, 1970.
- Cabrejos, J. (2009), "Amplificación Sísmica en la ciudad de Lima aplicando la Técnica de Cocientes Espectrales," Facultad de Ingeniería Civil, Universidad Nacional de Ingeniería, Lima, Perú (in spanish).
- Calderon, D. (2012), "Dynamic Characteristics of the Soils in Lima, by estimating Shallow and Deep Shear-Wave Velocity Profiles," Ph.D. Thesis, Chiba University, Japan.
- Espinoza A. F., Husid L. R., Algermissen S. T. and De Las Casas J. (1977), "The Lima earthquake of October 3, 1974: Intensity Distribution," *Bull. Seism. Soc. Amer.* 67(5), 1429-1439.
- Field, E. H. and Jacob, K. H. (1995), "A comparison test of various site response estimation techniques, including three that are not reference site dependent," *Bull. Seism. Soc. Amer.* 85, 1127-1143.
- Husid L. R. (1969), "Características de terremotos - análisis general," *Revista del IDIEM* 8, 21-42 (in spanish).
- Husid, L. R., Espinoza, A. F. and De Las Casas J. (1977), "The Lima earthquake of October 3, 1974: Damage Distribution," *Bull. Seismol. Soc. Amer.* 67(5), 1441-1472.
- Iwata T. and Irikura K. (1988), "Source parameters of the 1983 Japan Sea earthquake sequence," *J. Phys. Earth* 36, 155-184.
- Le Roux, J.P., Tavares, C., and Alayza, F. (2002), "Sedimentology of the Rimac-Chillon alluvial fan at Lima, Peru, as related to Plio-Pleistocene sea-level changes, glacial cycles and tectonics," *Journal of South American Earth Sciences*, 13, 499-510.
- Lee, K. L. and Monge, J. (1968), "Effect of soil conditions on damage in the Peru earthquake of October 17, 1966," *Bull. Seismol. Soc. Amer.* 58, 937-962.
- Lermo J. and Chavez-Garcia F. J. (1993), "Site effects evaluation using spectral ratios with only one station," *Bull. Seismol. Soc. Amer.* 83, 1574-1594.
- Martínez, A. and Porturas, F. (1975), "Planos Geotécnicos para

- Lima, Perú. Análisis y Visión en Ingeniería Sísmica,” Pontificia Universidad Católica del Perú, Lima, Perú (in spanish).
- Martínez, A. (2007), “Conglomerado de Lima Metropolitana en Cimentaciones”, Conferencia Internacional en Ingeniería Sísmica, Centro Peruano Japonés de Investigaciones Sísmicas y Mitigación de Desastres (CISMID), Facultad de Ingeniería Civil (FIC), Universidad Nacional de Ingeniería (UNI), Lima, Perú (in spanish).
- Nakamura, Y. (1988), “Inference of seismic responses of surface layer based on Microtremor measurement,” Quarterly Report on Railway Research 4, 18–27 (in Japanese).
- Okal, E.A., Borrero, J.C., and Synolakis C.E. (2006), “Evaluation of tsunami risk from regional earthquakes at Pisco, Peru,” *Bull. Seismol. Soc. Amer.*, 96, 1634-1648.
- Pulido N., Tavera H., Aguilar Z., Nakai S., and Yamazaki F. (2010), “Estimation of the seismic hazard for the Lima Metropolitan region: Earthquake scenarios and strong motion simulation,” *XV Peruvian Geological Congress*, Cusco, Peru.
- Quispe, S. (2010), “Preliminary Analysis for Evaluation of Local Site Effects in Lima City, Peru from Strong Ground Motion Data by the Spectral Inversion Method,” Studies by participant at the IISEE 45, 1-32.
- Repetto, P., Arango, I., and Seed, H. B. (1980), “Influence of site characteristics on building damage during the October 3, 1974 Lima earthquake,” Report-Earthquake Engineering Research Center, College of Engineering, University of California, Berkeley, California, NTIS, 80–41.
- Riepl J., Bard P.-Y., Hatzheld D., Papaionnou C., and Nechtschein S. (1998) “Detail evaluation of site response estimation methods across and along the sedimentary valley of Volvi (EURO-SEISTEST).” *Bull. Seism. Soc. Am.* 88, 488–502.
- Stephenson, W.R., Benites, R.A. and Davenport, P.N. (2009), “Localized coherent response of the La Molina basin (Lima, Peru) to earthquakes, and future approaches suggested by Parkway basin (New Zealand) experience,” *Solid dynamics and earthquake engineering*, 29(10), 1347-1357.
- Takemura, M., Kato, K., Ikeura, T., and Shima, E. (1991), “Site Amplification of S-Waves from Strong Motion Records in Special Relation to Surface Geology”, *J. Phys. Earth*, 39, 537-552.
- Uetake, T. and Kudo, K. (2005), “Assessment of Site Effects on Seismic Motion in Ashigara Valley, Japan,” *Bull. Seismol. Soc. Amer.* 95, 4 2297–2317.